


| | | | | | | | | | | | |
|---|----------|----------------|-------------------|------------------|------|---------------|--------------------|-----------|-------------------|--------|-----------|
| | 6 | 5 | | 4 | | 3 | | 2 | | 1 | Confirmed |
| | Spec. | mm | mm | Chucking Dia. mm | | kgf | kgf | r.p.m. | l | kg | |
| | Model | Plunger Stroke | Jaw Stroke (Dia.) | Max. | min. | Max D.B. pull | Max clamping force | Max speed | kg m ² | Weight | |
| D | CBD-65A6 | 4.5 | - | 65 | 4 | 4500 | 10500 | 6000 | - | 8.6 | D |

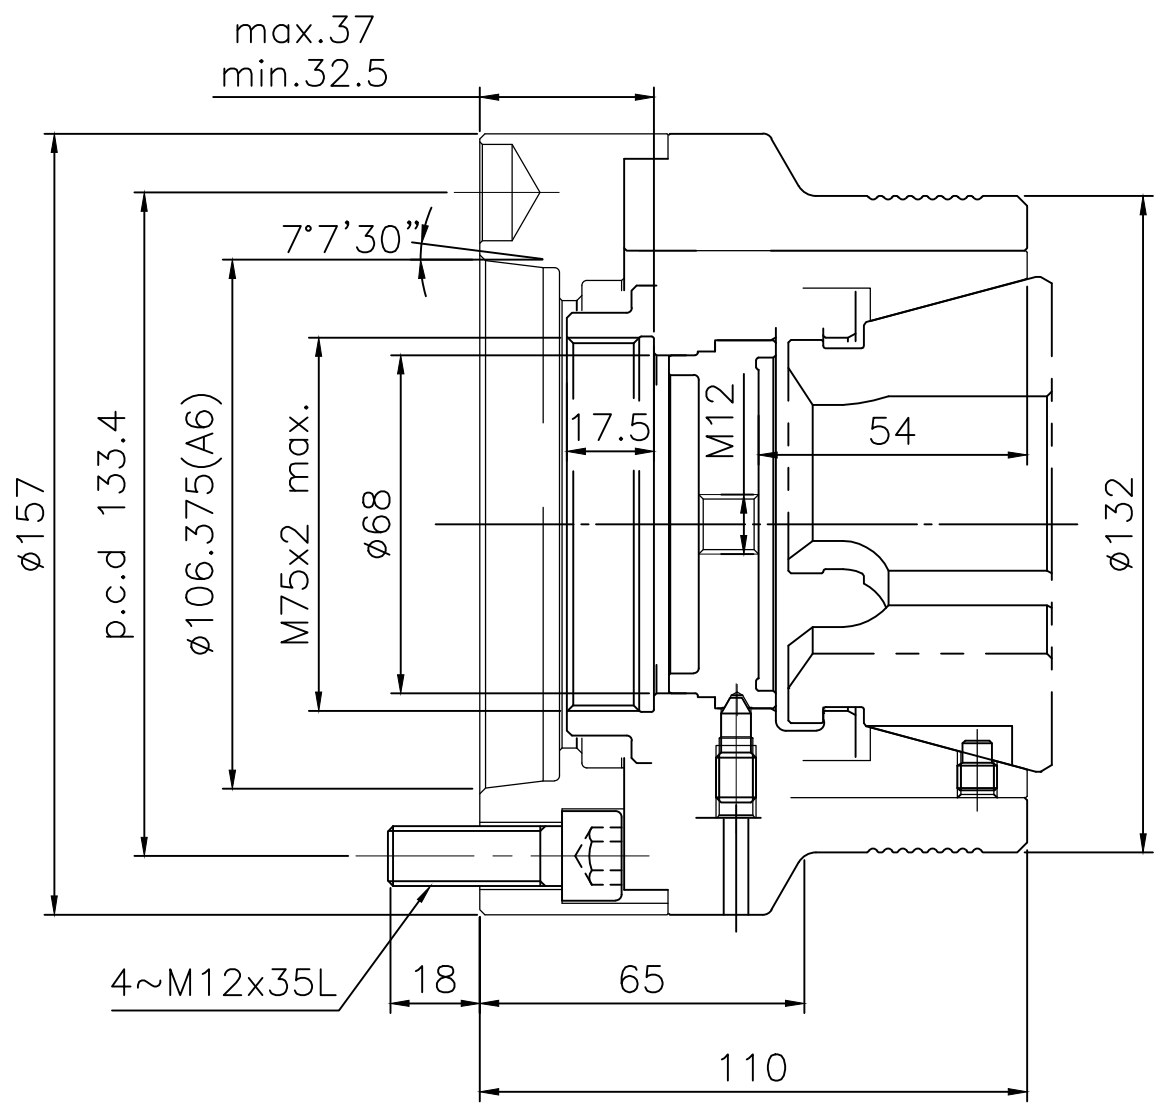

LEADER CHUCK INTERNATIONAL
+44 (0) 1827 700000
+353 (0)1 254 2555
INFORMATION@LEADERCHUCK.COM
LEADERCHUCK.COM

TITLE:
Deadlength Collet Chuck
with Part Location Stop

DRAWING NO.:
A4 \ AG - CBD - 65A6



| | | | | | | | | | | |
|--|---|---|--|---|--|---|--|---|--|---|
| | 6 | 5 | | 4 | | 3 | | 2 | | 1 |
|--|---|---|--|---|--|---|--|---|--|---|