


6		5		4		3		2		1	
Spec.	mm	Chuck Dia. mm		Max gripping force kN		Max pressure kg/cm <sup>2</sup>		kg/cm <sup>2</sup>	(use pressure 6.0kgf/cm <sup>2</sup> ) lit	kg	Confirmed
Model	Jaw Stroke (Dia.)	Max.	min.	Pneumatic at 6.0kgf/cm <sup>2</sup>	Hydraulic at 13.0kgf/cm <sup>2</sup>	Air pressure Pneumatic	Oil pressure Hydraulic	Min. pressure	Air consumption (at 6.0 kgf/cm <sup>2</sup> )	Weight	
SU-306	5	105	31	18.5	40	6	13	2	0.58	18	

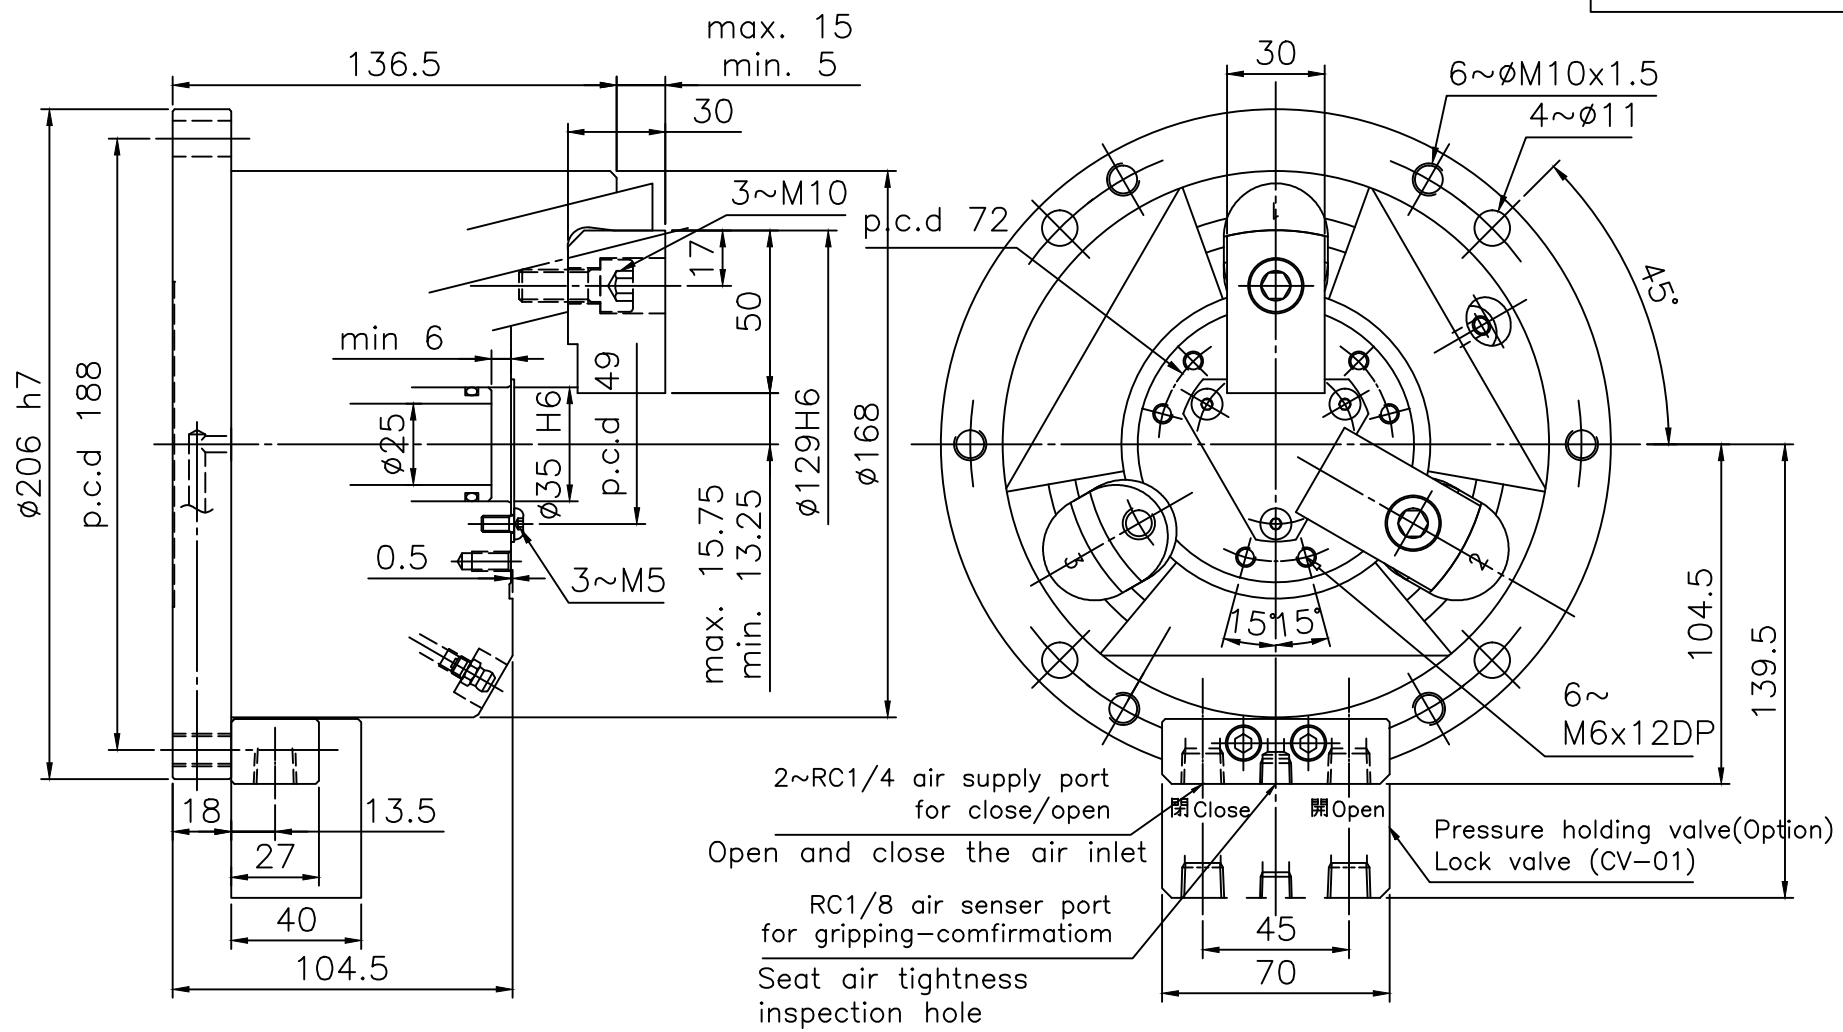

LEADER CHUCK INTERNATIONAL  
+44 (0) 1827 700000  
+353 (0)1 254 2555  
INFORMATION@LEADERCHUCK.COM  
LEADERCHUCK.COM

TITLE:  
3 Jaw Partial Open Centre Self Contained  
Hydraulic or Pneumatic Pull-Lock Power Chuck  
with Simultaneous Radial & Axial Clamping

DRAWING NO.:  
A4 \ AG-SU-306



6		5		4		3		2		1	
---	--	---	--	---	--	---	--	---	--	---	--