


Spec.	mm	Chuck Dia. mm		Max gripping force kN		Max pressure kg/cm ²		kg/cm ²	(use pressure 6.0kgf/cm ²) lit	kg	Confirmed
		Max.	min.	Pneumatic at 6.0kgf/cm ²	Hydraulic at 13.0kgf/cm ²	Air pressure Pneumatic	Oil pressure Hydraulic				
Model	Jaw Stroke (Dia.)										
SU-308	5	132	32	37	80	6	13	2	1.02	31.5	

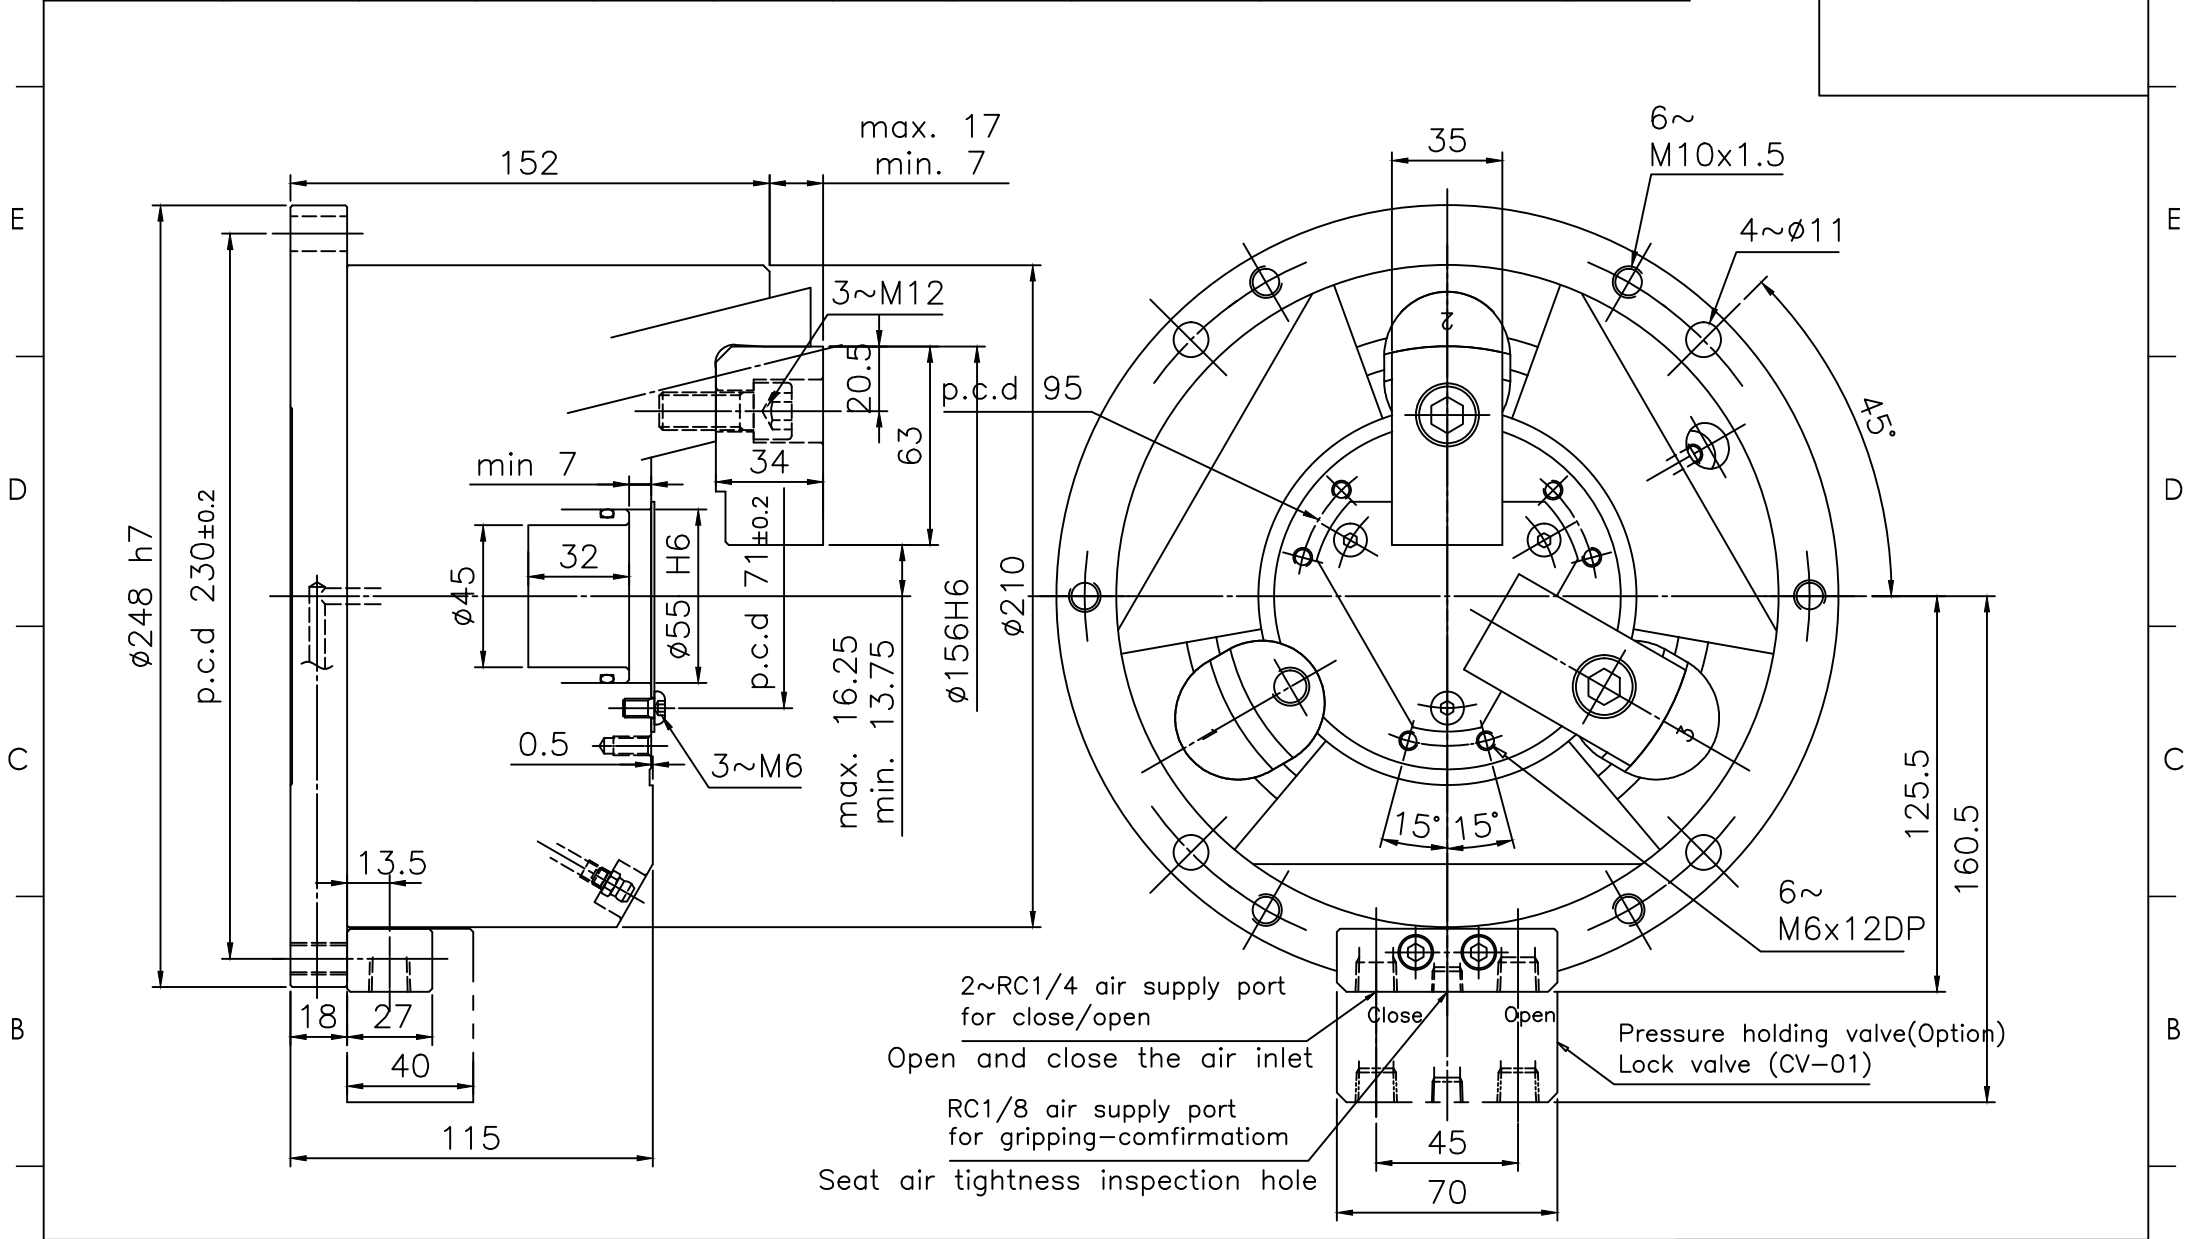

LEADER CHUCK INTERNATIONAL +44 (0) 1827 700000 +353 (0) 1 254 2555 INFORMATION@LEADERCHUCK.COM LEADERCHUCK.COM	TITLE: 3 Jaw Partial Open Centre Self Contained Hydraulic or Pneumatic Pull-Lock Power Chuck with Simultaneous Radial & Axial Clamping	DRAWING NO.: A3 \ AG-SU-308	
--	---	--------------------------------	--